

LED MR16

產品特色

- ▶ 使用高效率的日亞 LED
- ▶ 符合 RoHS 標準
- ▶ 不含汞，低環境污染
- ▶ 即時啟動
- ▶ 無紫外線
- ▶ 可直接替換傳統的 MR16 燈泡



產品規格

消耗功率	4.6W		5 W	
產品照片				
色溫	3000±250K	5100±500K	3000±250K	5100±500K
演色性	85	70	85	70
輸入電壓	12 VDC/VAC		100~240 VAC	
總流明	215 lm	240 lm	215 lm	240 lm
可視角度	20° / 30°			
中心照度 (1m)	795 lux (20°)	898 lux (20°)	795 lux (20°)	898 lux (20°)
	757 lux (30°)	855 lux (30°)	757 lux (30°)	855 lux (30°)
燈具壽命	> 10000 hrs			
儲存溫度	-20°C~60°C			
操作溫度	-20°C~40°C			
操作環境	室內			
基座	GU5.3		GU10、E11	
尺寸	Φ 49 mm x H 41.2 mm (without pin)		Φ 49 mm x (H) 51.6 mm (GU10) Φ 49 mm x (H) 68.9 mm (E11)	
重量	25 g		38 g	



※ Measurement allowance is ±10%

產品尺寸 (單位: mm)



GU5.3



GU10




E11




燈具出光角度 (at Ta=25°C)

20°

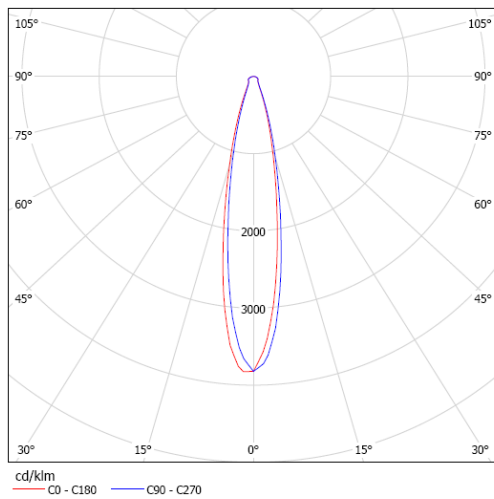

30°

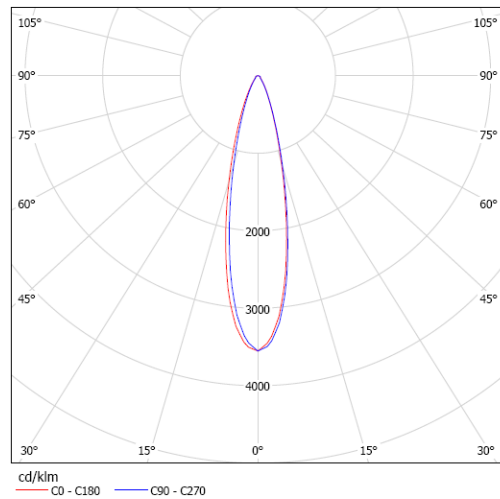

中心照度 (at Ta=25°C)

20°

Warm White	Cool White
3120 lux	3525 lux
795 lux	898 lux
200 lux	225 lux
88.5 lux	100 lux

30°

Warm White	Cool White
3000 lux	3375 lux
757 lux	855 lux
190 lux	214 lux
84.5 lux	95 lux

注意事項

LED MR16 GU5.3 建議使用輸出 DC12V/500mA 變壓器

請勿將燈具放入水中